

45. Mounting in accordance with claim 44, wherein said erosion-resistant fiber mat sections have wave-shaped tongues and said swelling mat sections are pressure-resistant swelling mat sections with wave-shaped cutouts.

REMARKS

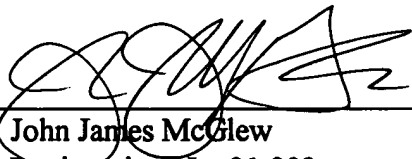
Claims 23 to 45 are in this application and are presented for consideration. Claims 1 to 22 have been canceled. The new claims present subject matter similar to the original claims, but in a different form.

The specification and claims have been amended in order to place this application in better form. The reference to claims in the specification has been deleted or amended. Appropriate headings have been added. No new matter has been added.

Favorable action on the merits is respectfully requested.

Respectfully submitted  
for Applicant,

By: \_\_\_\_\_

  
John James McGlew  
Registration No. 31,903  
McGLEW AND TUTTLE, P.C.

JJM:jj  
67066.1

Enclosed: Substitute Specification and Marked Up Copy Of Translation

DATED: July 27, 2000  
SCARBOROUGH STATION  
SCARBOROUGH, NEW YORK 10510-0827  
(914) 941-5600



1900 1901 1902 1903 1904 1905 1906 1907 1908 1909 1910 1911 1912 1913 1914 1915 1916 1917 1918 1919 1920 1921 1922 1923 1924 1925 1926 1927 1928 1929 1930 1931 1932 1933 1934 1935 1936 1937 1938 1939 1940 1941 1942 1943 1944 1945 1946 1947 1948 1949 1950 1951 1952 1953 1954 1955 1956 1957 1958 1959 1960 1961 1962 1963 1964 1965 1966 1967 1968 1969 1970 1971 1972 1973 1974 1975 1976 1977 1978 1979 1980 1981 1982 1983 1984 1985 1986 1987 1988 1989 1990 1991 1992 1993 1994 1995 1996 1997 1998 1999 2000 2001 2002 2003 2004 2005 2006 2007 2008 2009 2010 2011 2012 2013 2014 2015 2016 2017 2018 2019 2020 2021 2022 2023 2024 2025 2026 2027 2028 2029 2030 2031 2032 2033 2034 2035 2036 2037 2038 2039 2040 2041 2042 2043 2044 2045 2046 2047 2048 2049 2050 2051 2052 2053 2054 2055 2056 2057 2058 2059 2060 2061 2062 2063 2064 2065 2066 2067 2068 2069 2070 2071 2072 2073 2074 2075 2076 2077 2078 2079 2080 2081 2082 2083 2084 2085 2086 2087 2088 2089 2090 2091 2092 2093 2094 2095 2096 2097 2098 2099 2100 2101 2102 2103 2104 2105 2106 2107 2108 2109 2110 2111 2112 2113 2114 2115 2116 2117 2118 2119 2120 2121 2122 2123 2124 2125 2126 2127 2128 2129 2130 2131 2132 2133 2134 2135 2136 2137 2138 2139 2140 2141 2142 2143 2144 2145 2146 2147 2148 2149 2150 2151 2152 2153 2154 2155 2156 2157 2158 2159 2160 2161 2162 2163 2164 2165 2166 2167 2168 2169 2170 2171 2172 2173 2174 2175 2176 2177 2178 2179 2180 2181 2182 2183 2184 2185 2186 2187 2188 2189 2190 2191 2192 2193 2194 2195 2196 2197 2198 2199 2200 2201 2202 2203 2204 2205 2206 2207 2208 2209 2210 2211 2212 2213 2214 2215 2216 2217 2218 2219 2220 2221 2222 2223 2224 2225 2226 2227 2228 2229 2230 2231 2232 2233 2234 2235 2236 2237 2238 2239 2240 2241 2242 2243 2244 2245 2246 2247 2248 2249 2250 2251 2252 2253 2254 2255 2256 2257 2258 2259 2260 2261 2262 2263 2264 2265 2266 2267 2268 2269 2270 2271 2272 2273 2274 2275 2276 2277 2278 2279 2280 2281 2282 2283 2284 2285 2286 2287 2288 2289 2290 2291 2292 2293 2294 2295 2296 2297 2298 2299 2300 2301 2302 2303 2304 2305 2306 2307 2308 2309 2310 2311 2312 2313 2314 2315 2316 2317 2318 2319 2320 2321 2322 2323 2324 2325 2326 2327 2328 2329 2330 2331 2332 2333 2334 2335 2336 2337 2338 2339 2340 2341 2342 2343 2344 2345 2346 2347 2348 2349 2350 2351 2352 2353 2354 2355 2356 2357 2358 2359 2360 2361 2362 2363 2364 2365 2366 2367 2368 2369 2370 2371 2372 2373 2374 2375 2376 2377 2378 2379 2380 2381 2382 2383 2384 2385 2386 2387 2388 2389 2390 2391 2392 2393 2394 2395 2396 2397 2398 2399 2400 2401 2402 2403 2404 2405 2406 2407 2408 2409 2410 2411 2412 2413 2414 2415 2416 2417 2418 2419 2420 2421 2422 2423 2424 2425 2426 2427 2428 2429 2430 2431 2432 2433 2434 2435 2436 2437 2438 2439 2440 2441 2442 2443 2444 2445 2446 2447 2448 2449 2450 2451 2452 2453 2454 2455 2456 2457 2458 2459 2460 2461 2462 2463 2464 2465 2466 2467 2468 2469 2470 2471 2472 2473 2474 2475 2476 2477 2478 2479 2480 2481 2482 2483 2484 2485 2486 2487 2488 2489 2490 2491 2492 2493 2494 2495 2496 2497 2498 2499 2500 2501 2502 2503 2504 2505 2506 2507 2508 2509 2510 2511 2512 2513 2514 2515 2516 2517 2518 2519 2520 2521 2522 2523 2524 2525 2526 2527 2528 2529 2530 2531 2532 2533 2534 2535 2536 2537 2538 2539 2540 2541 2542 2543 2544 2545 2546 2547 2548 2549 2550 2551 2552 2553 2554 2555 2556 2557 2558 2559 2560 2561 2562 2563 2564 2565 2566 2567 2568 2569 2570 2571 2572 2573 2574 2575 2576 2577 2578 2579 2580 2581 2582 2583 2584 2585 2586 2587 2588 2589 2590 2591 2592 2593 2594 2595 2596 2597 2598 2599 2600 2601 2602 2603 2604 2605 2606 2607 2608 2609 2610 2611 2612 2613 2614 2615 2616 2617 2618 2619 2620 2621 2622 2623 2624 2625 2626 2627 2628 2629 2630 2631 2632 2633 2634 2635 2636 2637 2638 2639 2640 2641 2642 2643 2644 2645 2646 2647 2648 2649 2650 2651 2652 2653 2654 2655 2656 2657 2658 2659 2660 2661 2662 2663 2664 2665 2666 2667 2668 2669 2670 2671 2672 2673 2674 2675 2676 2677 2678 2679 2680 2681 2682 2683 2684 2685 2686 2687 2688 2689 2690 2691 2692 2693 2694 2695 2696 2697 2698 2699 2700 2701 2702 2703 2704 2705 2706 2707 2708 2709 2710 2711 2712 2713 2714 2715 2716 2717 2

BY: Jon Duran DATE: July 27, 2000

7/PTP

09/582548  
430 RSD PCT/PTO 27 JUN 2000

Docket # 67066

**PROCESS FOR HOLDING AND INSULATING CERAMIC  
MONOLITHS  
IN A MOTOR VEHICLE EXHAUST GAS UNIT  
INCLUDING MOUNT MANUFACTURED  
ACCORDING TO THIS PROCESS**

**FIELD OF THE INVENTION**

The present invention pertains to a process for holding or mounting and insulating ceramic monoliths in a motor vehicle exhaust gas unit, with a housing (pipe or half shells) preferably having a nonround (e.g., oval or triangular) cross section and with one or more inner ceramic monoliths of a corresponding cross section, wherein the ceramic monolith is wrapped with a mounting mat and is mounted in the housing and the mounting mat may have at least one

09/582548 080700

swelling mat, which is a mixture of ceramic fibers, expanded mica and organic binder. The present invention also pertains to a mount itself manufactured according to the above-described process.

## BACKGROUND OF THE INVENTION

5           Mainly a swelling mat - a mixture of ceramic fibers, vermiculite micas and organic binders - is currently used to hold and insulate ceramic monoliths in motor vehicle exhaust gas units. The felt mat is wrapped around the monoliths and is pressed in height and thickness by insertion and closing the housing (or by pushing into a pipe or wrapping around with an open pipe and tensioning and closing the pipe). As a result, the swollen mat builds up a compressive strength against the monolith and the housing and holds the ceramic monoliths in the exhaust gas unit by friction between the monolith and the swelling mat, on the one hand, and between the housing and the swelling mat, on the other hand, under load exerted by the forces occurring during the operation (pressure loss on the monolith, acceleration forces on the system). When the temperature rises during the operation, the holding forces of the swelling mat increase due to the thermal tensioning of the vermiculite against the ceramic fibers. The pressing of the swelling mat increases with rising temperature and also with increasing friction. This functions very well in the case of round catalytic converters with uniform, circular gap. The swelling mat becomes adjusted with rising temperature considerably more than what the system loses in tension due to the housing pipe widening against the monolith due to thermal expansion.

10  
15  
20

However, geometrically more unfavorable shapes, such as triangles, polygons and flat ovals,

so-called racetracks, are also used besides round monoliths to utilize the free cross sections in the tunnel of a vehicle bottom for the largest possible cross-sectional areas of the monolith (to minimize the pressure loss).

In the case of such cross-sectional shapes, the rigidity of the housing is usually not sufficient during assembly or even during the operation to maintain a constant mounting gap for the swelling mat. Expansion by elasticity takes place in the larger radii or in the flatter areas of the housings during assembly and widening additionally takes place during the operation due to the increased pressing of the swelling mat under [elevated] temperature. This leads to a nonuniform pressure distribution on the circumference. The highest pressures and consequently the strongest holding forces are generated in the small radii of the cross section and the gaps increase at the large radii. However, the erosion resistance of the swelling mat decreases with increasing gaps. It becomes susceptible to gas pulsations penetrating into the swelling mat and to vibrations. The mica grains practically become detached from the composite and break apart the fibers located next to them in the case of small swelling mat thicknesses and very high loads (accelerations, pulsations, temperatures, and rates of temperature change). They create small cavities for themselves in the mat, which become increasingly larger during the further operation and finally lead to the emptying of the mat, to the formation of a nonpurified exhaust gas bypass flow around the monolith and ultimately to the separation of the monolith with complete failure of the system.

To take the above-mentioned problem fundamentally into account, it is proposed according to DE 296 11 788 U1 that more erosion-resistant mat inserts, namely, Saffil inserts, be used in the larger radii of oval housings and monoliths in the case of a composite mat, while the aforementioned swelling mat material can be maintained in the smaller radii as before. To save expensive Saffil in less critical areas, each Saffil insert has recesses or grooves, which extend flush end to end with corresponding projections or tongues of swelling mat sections, in the axial center of the patchwork mat. These individual mat sections are held together by an adhesive tape. The drawback is the sharp-edged, rectangular cut of the tongue-and groove connection at the joints, which continues to be associated with problems in terms of erosion at the projecting corners of the swelling mat and the tongues. Furthermore, difficulties arise in connection with handling and assembly, namely, the problem of projecting corners being caught and of these corners being folded over during the mounting in the half shell or in a tubular housing. Another drawback is the fact that a large amount of waste of the expensive Saffil inserts is generated when the inserts are cut out of a basic mat of the corresponding material. This also applies to the waste generated during the cutting out of the swelling mat sections.

The applicant's own patents DE 38 35 841 ("Soft Intermediate Ring at the End of or Between the Monoliths," EP 0 387 422 ("Ceramic Ring") and EP 0 472 009 ("Wire Mesh Between the Monoliths") shall be referred to concerning other prior art. Both interrupted swelling mats in mounts with a plurality of monoliths and setback swelling mats with edge protection arranged in front of them are described in these patents, and t. The edge protection

also consists of fibrous material with sealing function. The use of other materials at the transition between the monoliths in the swelling mat mount in the form of an inner swelling mat protection or of a completely different elastic part is also described there.

## SUMMARY AND OBJECTS OF THE INVENTION

5           Based on the above-mentioned state of the art, the object of the present invention is to provide a process for holding and insulating ceramic monoliths in a housing of an exhaust gas unit of a motor vehicle of the type described in the introduction as well as such a holder or mount itself, which [process and holder] reliably prevent or at least minimize erosions in defined areas during the operation of the exhaust gas unit by means of simple measures.

10       ~~This object is accomplished by a process of the type described in claim 1.~~

~~Advantageous variants of the process are described in subclaims 2 through 16.~~

~~Expedient mounts and holders of ceramic monoliths in a motor vehicle exhaust gas [purification] housing are characterized by the features according to claims 17 through 22.~~

15       The essence of       According to the present invention is that the mounting mat and/or the housing are designed chemically and/or structurally by the use of specific individual or combined measures for minimizing the erosion at least in the areas at risk of erosion or in the

areas in which damage has occurred.

The mounting mat is built up, in particular, of a plurality of layers and of at least two layers, wherein the individual layers are selected and/or cut in the proper configuration corresponding to the local function of the layer during the operation for minimizing the erosion of the mounting mat as a whole with respect to the material used.

Fiber felts and/or fabric mats, which are assigned to at least one of the following materials or product groups, are preferably used as the temperature- and oxidation-resistant individual mats of the mounting mat:

- leached glass,
- quartz glass,
- aluminum oxide,
- mixtures of aluminum oxide and silica,
- certain boron and/or zirconium contents.

An individual mat consisting of ceramic fiber fabric, which is composed of the above-mentioned materials, may be used as the preferably inner layer of the mounting mat facing the monolith.

A wire mesh, which is cut preferably narrower in the axial extension than the rest of the



mounting mat, is preferably used as the inner support of the mounting mat.

Local, erosion-minimizing areas of thickened material may be introduced into or applied to the individual mat, in which case the individual mat may have indentations or perforations in the area in which the areas of thickened material are introduced or applied, and the said indentations or perforations fit the areas of thickened material in a positive-locking manner, so that a flat top side is formed in the installed or inserted state of the areas of thickened material and thickness and pressure compensation is brought about as a result.

Fibers with a thickness of 6 to 12  $\mu\text{m}$  are preferably used in individual mats in order to avoid health hazards during processing due to the respirability of fibers that are too fine and the skin irritation caused by fibers that are too thick.

Fiber mats which are designed for high and/or low operating temperatures of the exhaust gas unit may be used as the individual mat.

However, swelling mats, which are especially a combination of swelling and fiber mat sections arranged one behind the other, in which the connection joint of the individual swelling and fiber mat sections have a wavy shape, are also used as the individual mat.

In particular, an individual mat or the mounting mat is impregnated at least in the areas

at risk of erosion before they are wrapped around the ceramic monolith, the impregnation being performed on the side of the mat facing the monolith with diluted, heat-resistant adhesives made able to penetrate by means of a wetting agent, which are assigned to at least one of the following product groups:

- Colloidal solution of silicic acid dissolved in water,
- water glass,
- alkali siliconates, e.g., potassium methyl silicate,
- monoaluminum phosphate solution,
- aluminum chromium phosphate solution.

The adhesive is diluted during the impregnation to the extent that binder is present only in the contact areas between the fibers and optionally between the fibers and the mica.

In addition or as an alternative to this, the mounting mat may also be bonded to the ceramic monolith and/or the housing with a temperature-resistant mat adhesive, in which case the mat adhesive is applied to the inside of the housing and/or to the ceramic monolith and the mounting mat is inserted and mounted wet in the housing.

A mat adhesive used is assigned especially to one of the above-mentioned product groups.

The holding forces between the mounting mat and the housing are preferably brought about in a specific manner by positive locking, especially by increasing the surface roughness, before or during the assembly of the exhaust gas unit.

The surface roughness is increased, in particular, by milling or etching in rough areas, optionally by the use of a mat binder.

A pre-assembled phenolic resin adhesive film may be arranged on the outside of the mounting mat and inserted together with the mounting mat and it can bind on the inside of the housing during the operation of the exhaust gas unit during heating on the outside.

A multilayer mat, which is designed for the function during the operation of the exhaust gas unit, is used especially as a mounting mat in a special mounting of a ceramic monolith in a preferably nonround (e.g., oval or triangular) housing (pipe or half shells) of a motor vehicle exhaust gas unit, using a mounting mat having at least one swelling mat, in which case different swelling mats (with expanded mica) and/or fiber mats (without expanded mica or without granular components) may be provided on the inside and on the outside.

If the mounting mat has one or more fiber mats, the latter are preferably designed as shear-resistant mats.

A shear-resistant fiber mat has, in particular, oblique felt fibers, which extend at a flat angle of 5° to 60° from the underside to the top side of the mat and the ends of the felt fibers are bonded to the interfaces or to the underside and the top side of the mat.

As an alternative, a shear-resistant fiber mat may also have fibers that are arranged in loops over the thickness of the mat, in which case the loops are in contact with and are bonded to the top side and the underside of the mat.

An individual mat or the mounting mat itself is preferably composed in the circumferential direction of a ceramic monolith of swelling mat sections and intercalated fiber mat sections without granular components and without expanded mica, which are associated with the areas at risk of erosion, in which case the connection edges between the swelling mat sections and the fiber mat sections have a joint in a wavy shape and the mounting mat preferably faces the monolith.

The erosion-resistant fiber mat sections have wave-shaped tongues, while the pressure-resistant swelling mat sections have correspondingly wave-shaped cutouts.

The above-mentioned wave-shaped cut is a shape of a blank that is presented as a new cut here and it substantially differs from the sharp-edged, rectangular type of blank according to DE 296 11 788 U1 which was hitherto used. Since it is required for durable systems that the

joint be closed on the circumference, the length of the mat is selected to be such that it projects over the circumference (by about 3 mm) and is axially compressed at the joint during assembly as a result. Wave-shaped teeth are substantially more reliable in the process than a sharp-edged tongue-and-groove connection, because they engage one another better, the crumbly ends of the mat do not break off any longer, and projecting tips are no longer hung up during the closing of the half shells or during pushing into a jacket tube with the subsequent displacement and doubling of the mat in these areas. The shape of the wave-shaped teeth is selected to be such that the radii of the individual blanks engage one another and the mats, lying in contact with one another, can be cut out of the web-shaped raw material without cutting waste (cutting with a knife).

As was mentioned above, a preferred embodiment is a multilayer mounting mat, whose individual layers are tailored to the function during the operation of the exhaust gas unit. For example, different swelling mats and/or fiber mats may be provided on the inside and on the outside. Depending on the problems that occur, mats with high elasticity, high erosion resistance, swelling ability at low temperatures, swelling ability at high temperatures, resistance to extremely high temperatures or binders for defined temperatures over the extension of the mat (local) or in the depth of the mat (inner, outer or intermediate layer) are combined in order to obtain optimal function at an acceptable cost.

Especially preferable is, in particular, the bonding of the mats to the monolith and the

housing during the operation by means of suitable resin systems on the inside and/or the outside or the increasing of the friction by preparing the surface before or during the assembly (positive locking due to rough areas - milled-in or etched-in roughness, possibly with mat binder) to increase and stabilize the holding forces of the monolith.

5           An at least optional impregnation of the swelling mats and fiber mats to further increase the erosion resistance without a substantial reduction in elasticity is significant.

10           If fiber mats are present in a mounting mat, the fiber mats have a high shear resistance in order to transmit holding forces from the transition surfaces of the monolith to the mat and from the sheet metal jacket to the mat. Prior-art fiber mats are manufactured by laying the fibers layer by layer and subsequent needling or bonding. Interfaces, via which the mat slips apart, are formed over the height of the mat in the process. Mats according to the present invention are characterized by a different laying of the fibers and a different bonding of the mat. The individual fibers preferably extend at a flat angle of about 5° to 60° from the underside to the top side of the mat in order to make possible the bonding of the fibers ends at the interfaces in an optimal manner and yet to bring about a sufficient elasticity in the middle. Another possibility of achieving the elasticity and the shear resistance of a fiber mat is the design with loops, which are in contact with the top side and the underside.

~~The present invention will be described in greater detail below on the basis of exemplary~~

embodiments with reference to the drawings attached, in which

The various features of novelty which characterize the invention are pointed out with particularity in the claims annexed to and forming a part of this disclosure. For a better understanding of the invention, its operating advantages and specific objects attained by its uses, reference is made to the accompanying drawings and descriptive matter in which preferred embodiments of the invention are illustrated.

### BRIEF DESCRIPTION OF THE DRAWINGS

#### In the drawings:

Figure 1 shows a four-layer mounting mat built up according to the present invention for holding and insulating ceramic monoliths in a tubular housing of oval cross section for a motor vehicle exhaust gas unit in a planar or unwrapped schematic perspective view;

Figure 2 shows the perspective view of the two oval ceramic monoliths to be introduced into the oval tubular housing;

Figure 3 shows a perspective exploded view of the mounting mat according to Figure 1;

Figure 4 shows a two-layer mounting mat built up according to the present invention in a view similar to Figure 1;

Figure 5 shows the mounting mat according to Figure 4 in a perspective exploded view similar to Figure 3;

Figure 6 shows a three-layer mounting mat built up according to the present invention, which is similar to that shown in Figures 1 and 4;

Figure 7 shows the mounting mat according to Figure 6 in a perspective exploded view similar to Figures 3 and 5;

Figure 8 shows another two-layer mounting mat in a view similar to Figure 1;

Figure 9 shows an exploded view of the two-layer mounting mat according to Figure 8;

Figure 10 shows another three-layer mounting mat similar to Figure 6;

Figure 11 shows an exploded view of the mounting mat according to Figure 10;

Figure 12 shows a schematic perspective view of a tubular housing with a surface roughened up on the inside;



Figure 13 shows another multilayer mounting mat in a view similar to Figure 1;

Figure 14 shows the raw material of a fiber mat immediately after a wave-shaped cut to represent the blank without waste of material due to clippings;

Figure 15 shows a schematic sectional view of a multilayer mounting mat;

Figure 16 shows the cross section of the oval tubular housing with mounted multilayer mounting layer according to Figure 13 and ceramic monolith according to Figure 2;

Figure 17 schematically shows the partial top view of another second layer of a mounting mat according to Figure 7, where the arrangement of the blank with a small amount of clipping waste is shown corresponding to Figure 14; and

Figure 18 shows a schematic axial section of an exhaust gas unit according to the present invention, in which a mounting mat for two ceramic monoliths in an oval tubular housing with oblique felt fibers bonded at the end is shown above the axial center line and a mounting mat with fibers in the form of loops is shown under

the axial center line.

According **DESCRIPTION OF THE PREFERRED EMBODIMENT**

Referring to the drawings in particular, a mount for holding and insulating two ceramic monoliths 1, 2 of an oval cross section, which are arranged one behind the other, comprises according to Figure 2 a mounting mat 4 in a correspondingly oval tubular housing 3 of a motor vehicle exhaust gas unit 20.

As is shown in principle in Figure 18, the mounting mat 4 is wrapped around the two ceramic monoliths 1, 2 and it correspondingly holds the ceramic monoliths 1, 2 in the tubular housing 3.

The mounting mat 4 and/or the tubular housing 3 has/have a special design and/or is/are specially treated chemically as will be specifically described below at least in the areas at risk of erosion A of a mounted mounting mat during the operation of the motor vehicle exhaust gas unit or in the areas in which damage has occurred.

Especially with reference to Figures 1 through 17, the mounting mat 4 has a multilayer design and consists of at least two layers, wherein the material of the individual layers is selected corresponding to the function of the layer during the operation and is optionally cut in the proper configuration and/or the material is thickened.

Fiber felts and/or fabric mats which are assigned to at least one of the following materials or product groups are used as temperature- and oxidation-resistant individual layers or individual mats of the mounting mat 4:

- leached glass,
- quartz glass,
- aluminum oxide,
- mixtures of aluminum oxide and silica,
- certain boron and/or zirconium contents.

Ceramic fiber fabrics as well as swelling mats which are a mixture of ceramic fibers, expanded mica and organic binder are also used as individual layers.

Wire mesh 21 or ceramic fabrics which are cut narrower in the axial extension of the mount than the rest of the mounting mat 4 may be used for support.

Areas of thickened material 22, 23 may be locally introduced into or applied to the individual layer as an erosion protection, in which case the individual mat may have indentations or perforations 24, which fit the areas of thickened material in a positive-locking manner, in the area in which the areas of thickened material 22, 23 are introduced or applied.

Fibers with a thickness of 6 to 12  $\mu\text{m}$  are used in the individual mats.

A combination of swelling and fiber mat sections 5, 7 may be provided as individual mats, in which case the connection joint of the individual swelling and fiber mat sections has a wavy shape 11.

5           The individual mat or the mounting mat 4 may be impregnated at least in the areas A at risk of erosion before being wrapped around the ceramic monolith 1, 2, the impregnation being performed on the side of the mat facing the monolith with diluted, heat-resistant adhesives, which are made able to penetrate by means of a wetting agent and are assigned to at least one of the following product groups:

- 10
- Colloidal solution of silicic acid dissolved in water,
  - water glass,
  - alkali siliconates, e.g., potassium methyl silicate,
  - monoaluminum phosphate solution,
  - aluminum chromium phosphate solution.

15           The adhesive is diluted during the impregnation to the extent that binder is present only in the contact areas between the fibers and optionally between the fibers and the mica.

The mounting mat 4 may be bonded to the ceramic monolith 1, 2 and/or to the tubular

housing 3 with a temperature-resistant mat adhesive, in which case the mat adhesive is applied to the inside of the tubular housing 3 and/or to the ceramic monolith 1, 2 and the mounting mat 4 is inserted and mounted wet in the tubular housing 3.

The mat adhesive belongs to the product group of the adhesives that are used for impregnation.

With special reference to the embodiment variant according to Figures 1 and 3, a four-layer mounting mat 4 is provided, whose lowermost layer facing the tubular housing 3 is a swelling mat 6, which is designed for a low temperature with corresponding mica contents in the swelling mat such that sufficient expansion of the swelling mat takes place already at a low operating temperature.

The above-mentioned swelling mat 6 is joined by another swelling mat 5, which is designed for a higher operating temperature with a smaller mica content in the swelling mat.

The swelling mat 5 is joined on the inside by a layer of a ceramic fabric 20, which forms an erosion protection means.

The above-mentioned three individual layers may also be fiber mats, which are designed for low and higher operating temperatures corresponding to the layers 6 and 5 and for erosion

protection corresponding to layer 20.

A wire mesh 21 acting as a support for the above-mentioned three layers, which may also be a ceramic fabric, is provided as the fourth layer of the mounting mat 4 facing the monolith 1, 2.

5 All layers may be bonded to one another as well as to the tubular housing 3 and/or to the monoliths 1, 2 by means of adhesives. The individual layers may have different fiber directions for improved hold of the layers with one another.

10 It shall be mentioned concerning the configuration of the above-mentioned four individual layers that the wire mesh 21 is cut considerably narrower than the remaining three layers.

15 The ends on the left and right of the individual layers 6, 5, 20 according to Figures 1 and 3 have a wavy shape 11 to create an optimal joint during a 360° wrapping, as was described in the introduction. The layers 5 and 20 now have identical wave-shaped tongues 12 at the left-hand end of the layer and corresponding wave-shaped cutouts 13 at the right-hand end of the layer, while the wave-shaped tongue 12 and the wave-shaped cutout 13 of the layer 6 are provided reversed at the other ends in order to bring about an overlap in the joint area of the individual layers during the wrapping of the mounting mat 4 around the monolith, as can be

seen especially in Figure 1.

The embodiment variant of a mounting mat 4 according to Figures 4 and 5 comprises two layers: One holding mat 26 with an inner erosion protection brought about by impregnating the area A at risk of erosion with an adhesive as described above, which may be a swelling mat or a fiber mat, as well as an inner support in the form of a wire mesh 21 or of a ceramic fabric, as in the first exemplary embodiment according to Figures 1 and 3. The holding mat 26 has a wavy shape 11 at the end as do the layers 5, 20 in the first exemplary embodiment.

The third embodiment variant of a mounting mat 4 according to Figures 6 and 7 corresponds essentially to that according to Figures 4 and 5. However, no impregnation is provided here, but an additional "intermediate layer" is provided instead between the wire mesh 21 and the holding mat 26 in the form of local areas of thickened material 22 and 23 (fiber mat, fiber fabric, braiding), which have an oval shape and a thickness of about 2 mm in the exemplary embodiment shown, to provide erosion protection for areas at risk of erosion A of the holding mat 26 and the swelling mat.

Instead of the oval shape, other configurations may also be considered, e.g., a rounded "cloverleaf shape" of an individual leaf according to Figure 17, in which case a plurality of "cloverleaves" may be arranged at closely spaced locations next to one another in order to enlarge the area or to enlarge the area protected from erosion, such that practically no

intermediate spaces are formed, i.e., larger areas can be covered, optionally using a complete intermediate layer of the size of the holding mat 26.

As can also be seen in Figure 17, only a small amount of cutting waste of the expensive material is generated in the case of a "cloverleaf shape." Nevertheless, the wavy shape is prepared basically similarly to the individual layers according to Figure 3 with the advantages associated therewith.

The fourth embodiment variant of a mounting mat 4 according to Figures 8 and 9 has a two-layer design and has a holding mat 26 in the form of a swelling mat as well as strip-shaped areas of thickened material 22 and 23 in a wavy shape 11 as an erosion protection in the area of erosion hazard A. The strips extend (contrary to the ovals 22, 23 according to Figure 7) over the entire width of the mounting mat 4.

The fifth embodiment variant according to Figures 10 and 11 corresponds essentially to that according to Figures 6 and 7. However, not only are local areas of thickened material 22, 23 of an oval shape provided, but thickness and pressure compensation is provided for the above-mentioned ovals over the entire extension of the mat by means of an intermediate mat 27 (swelling mat, fiber mat), which has oval perforations 24 for the positive-locking fitting of the ovals.



In another design of the present invention, the holding forces between the mounting mat 4 and the tubular housing 3 can be brought about in a specific manner by positive locking, especially by increasing the surface roughness, before or during the assembly of an exhaust gas unit. In particular, the surface roughness can be increased by milling or etching in rough areas. Figure 12 correspondingly shows an oval tubular housing 3 with a surface 14 roughened on the inside for the positive-locking holding of a mounting mat 4 to be accommodated. A lubricant is used as an assembly aid for pushing in the mounting mat.

Figure 13 illustrates the design of a multilayer mounting mat 4. A layer of an individual mat consisting alternately of swelling mat sections 5 for expansion at high temperature and erosion-resistant fiber mat sections 7, where the connecting joint has a wavy shape 11, is located inside in close proximity of the monoliths 1, 2. A phenolic resin film carrier 15 designed as an adhesive layer is located on the outside in the direction of the inside of the tubular housing 3. A layer of another swelling mat 6 of such a consistency of mica components that expansion occurs already at low temperature is located between the adhesive layer and the above-mentioned combined individual mat. A preassembled phenolic resin adhesive film 15 is arranged on the outside of the mounting mat 4 for assembly and is inserted together with the mounting mat 4 and is bonded to the inside of the tubular housing 3 during the operation of the exhaust gas unit during heating on the outside.

As can be determined from Figure 14, a fiber mat 4 can be prepared in the form of a

wave-shaped blank 11 without cutting waste.

Figure 15 illustrates a cross section through a multilayer mounting mat 4, while Figure 16 shows the overall arrangement of the exhaust gas unit 20 after mounting in a schematic cross section.

Figure 18 shows a motor vehicle exhaust gas unit 20 with an oval tubular housing 3, in which two ceramic monoliths 1, 2 are arranged one behind the other.

The ceramic monoliths 1, 2 are held in a wrapped-around mounting mat 4.

The mounting mat 4 according to Figure 18, top, is composed of felt fibers which are arranged obliquely to the axial axis at an angle  $\alpha$  of approx.  $30^\circ$  and are bonded at the end to the interfaces 9, 10.

The mounting mat 4 according to Figure 18, bottom, is composed of fibers that extend in loops over the thickness of the mounting mat, wherein the loops 11 are bonded in the area of the interfaces 9, 10.

It shall also be noted that the independently patentable features contained in the subclaims shall have corresponding independent protection despite the formal reference to the



## Patent Claims

1. ~~Process for holding~~ While specific embodiments of the invention have been shown and described in detail to illustrate the application of the principles of the invention, it will be understood that the invention may be embodied otherwise without departing from such principles.

## ABSTRACT OF THE DISCLOSURE

According to the invention, a special bearing mat (4) is used for mounting and insulating said ceramic monoliths (1, 2) in a said motor vehicle exhaust gas unit (20), with a said housing (3) (pipe or half shells) preferably having a nonround (e.g., oval or triangular) cross section and with one or more said inner ceramic monoliths (1, 2) of a corresponding preferably oval housing (3) of an automobile exhaust system (20), especially for non-round housing cross section; wherein a said mounting mat (4) is wrapped around the ceramic monolith and is mounted in the said housing (3) and the said mounting mat (4) may have at least one said swelling mat (5, 6), which is a mixture of ceramic fibers, expanded mica and organic binder,

— characterized in that

— the said mounting sections. Said bearing mat (4) and/or the said housing (3) is treated chemically and/or structurally for minimizing the erosion at least in the said areas at risk of erosion (A) or in the areas in which damage has occurred.

2. — Process in accordance with claim 1,

— characterized in that

— the said mounting mat (4) has a multilayer design consisting of at least two layers, wherein the material used for the individual layers is selected corresponding to the function of the layer during the operation for minimizing the erosion of the said

mounting mat (4) as a whole and/or is cut in the proper configuration:

3. ~~Process in accordance with claim 2;~~

~~characterized in that~~

~~fiber felts and/or fabric mats which are assigned to at least one of the following materials or product groups are used as the temperature- and oxidation-resistant individual mats of the said mounting mat (4):~~

~~- Leached glass~~

~~- quartz glass~~

~~- aluminum oxide~~

~~- mixtures of aluminum oxide and silica~~

~~- certain boron and/or zirconium contents.~~

4. ~~Process in accordance with claim 2 or 3;~~

~~characterized in that~~

~~an individual mat consisting of said ceramic fiber fabric (20) is used as the preferably inner layer of the said mounting mat (4) facing the said housing (3).~~

5. ~~Process in accordance with one of the claims 2 through 4;~~

~~characterized in that~~

~~a said wire mesh (21), which is cut narrower preferably in the axial extension of the~~

mount than the rest of the said mounting mat (4), is used as the inner support of the said mounting mat (4).

6. — Process in accordance with one of the claims 2 through 5,

— characterized in that

— said local erosion-minimizing areas of thickened material (22, 23) are introduced into or applied to the individual mat, wherein the individual mat may have said indentations or perforations (24), which fit the areas of thickened material in a positive-locking manner, in the area in which the said areas of thickened material (22, 23) are introduced or applied.

7. — Process in accordance with one of the claims 2 through 6,

— characterized in that

— fibers with a thickness of 6 to 12  $\mu\text{m}$  are used in the individual mats.

8. — Process in accordance with one of the claims 2 through 6,

— characterized in that

— a swelling mat is used as the individual mat.

9. — Process in accordance with claim 8,

— characterized in that

~~a combination of said swelling mat and fiber mat sections (5, 6) arranged one behind the other is used as the individual mat, wherein the connection joint of the individual swelling mat and fiber mat sections has a said wavy shape (11):~~

~~10. Process in accordance with one of the claims 1 through 9,~~

~~characterized in that~~

~~the individual mat or the said mounting mat (4) is impregnated in the said areas at risk of erosion (A) before being wrapped around the said ceramic monoliths (1, 2), wherein the impregnation is performed on the side of the mat facing the monolith with diluted, heat-resistant adhesives, which are made able to penetrate with a wetting agent and are assigned to at least one of the following product groups:~~

~~- Colloidal solution of silicic acid dissolved in water,~~

~~- water glass,~~

~~- alkali siliconates, e.g., potassium methyl silicate,~~

~~- monoaluminum phosphate solution, and~~

~~- aluminum chromium phosphate solution.~~

~~11. Process in accordance with claim 10,~~

~~characterized in that~~

~~the adhesive is diluted during the impregnation to the extent that binder is present only in the contact areas between the fibers and optionally between the fibers and the mica~~



binder.

~~12. Process in accordance with one of the claims 1 through 11,~~

~~characterized in that~~

~~the said mounting mat (4) is bonded to the said ceramic monolith (1, 2) and/or the said housing (3) with a temperature-resistant mat adhesive, wherein the mat adhesive is applied to the inside of the said housing (3) and/or to the said ceramic monolith (1, 2) and the said mounting mat (4) is inserted and is mounted wet in the said housing (3).~~

~~13. Process in accordance with claim 12,~~

~~characterized in that~~

~~a mat adhesive that is assigned to at least one of the following product groups is used:~~

~~- Colloidal solution of silicic acid dissolved in water,~~

~~- water glass,~~

~~- alkali siliconates, e.g., potassium methyl silicate,~~

~~- monoaluminum phosphate solution, and~~

~~- aluminum chromium phosphate solution.~~

~~14. Process in accordance with one of the claims 1 through 13,~~

~~characterized in that~~

~~the holding forces between the said mounting mat (4) and the said housing (3) are~~

90 brought about in a specific manner by positive locking, especially by increasing the surface roughness, before or during the assembly of the said exhaust gas unit (20).

15. ~~Process in accordance with claim 14,~~

~~characterized in that~~

~~the surface roughness is increased by milling or etching in said rough areas (14),~~

95 optionally using a mat binder.

16. ~~Process in accordance with one of the claims 1 through 15,~~

~~characterized in that~~

100 ~~a said preassembled phenolic resin adhesive film (15) is arranged on the outside of the said mounting mat (4) and is inserted together with the mounting mat and is bonded on the inside of the said housing (3) during the operation~~  
is/are specially structured and/or chemically treated, especially impregnated at the points which are at risk of eroding (A) in order to increase resistance to erosion. The bearing mat (4) is adapted to suit the functioning of the exhaust gas unit during heating on the outside.

105 17. ~~Mounting of at least one said ceramic monolith (1, 2) in a said, preferably nonround (e.g., oval or triangular) housing (3) (pipe or half shells) of a said motor vehicle exhaust unit (20) using a said mounting mat (4), which has at least one said swelling mat (5, 6), designed according to a process in accordance with claims 1 through 16,~~

~~characterized in that~~

~~the said mounting mat (4) is a multilayer mat tailored to the function during the operation of the said exhaust gas unit (20), wherein said different swelling mats (5, 6) (with expanded mica) and/or said fiber mats (7) (without expanded mica or without granular components) may be provided on the inside and on the outside.~~

~~18. Mounting in accordance with one of the claims 1 through 17,~~

~~characterized in that~~

~~the said fiber mat (7) of one said mounting mat (4) is designed as a shear-resistant mat.~~

~~19. Mounting in accordance with claim 18,~~

~~characterized in that~~

~~the said shear-resistant fiber mat (7) has said oblique felt fibers (8), which extend at a flat angle ( $\alpha$ ) of 5° to 60° from the said underside to the said top side (9 and 10; respectively), of the mat and the ends of the felt fibers are bonded on the interfaces or the said underside and top side (9, 10) of the mat.~~

~~20. Mounting in accordance with claim 19,~~

~~characterized in that~~

~~the said shear-resistant fiber mat (7) has fibers that are arranged in said loops (11) over the thickness of the mat, wherein the loops are in contact with and bonded on the said~~

~~top side and the said underside (10, 9) of the mat.~~

21. ~~Mounting in accordance with one of the claims 1 through 20,~~

~~characterized in that~~

~~an individual mat or the said mounting mat (4) is composed, in the circumferential direction of a said ceramic monolith (1, 2), of said swelling mat sections (5) and said intercalated fiber mat sections (7) without granular components and without expanded mica, which are associated with the said areas (A) at risk of erosion, wherein the connection edges between the swelling mat sections and the fiber mat sections have a mutually meshing joint in a said wavy shape (11) and the said individual mat preferably faces the said ceramic monolith (1, 2).~~

22. ~~Mounting in accordance with claim 21,~~

~~characterized in that~~

~~the said erosion-resistant fiber mat sections (7) have said wave-shaped tongues (12) and the said pressure-resistant swelling mat sections (5) have said wave-shaped cutouts (13).~~

system (20) during operation and is especially configured with several layers

004000" 04523540

67066.2